


P2 Relay V23079

- Standard telecom relay (ringing and test access)
- Slim line 15x7.5mm (.590x.295")
- Max. switching current 5A
- 2 form C bifurcated contacts (2 changeover contacts, 2 CO)
- Immersion cleanable
- High sensitivity for low power consumption 140mW/ 70mW
- Single coil version with surge voltage resistance between contact and coil: 2.5kV (2/10µs) meets the Telcordia Requirement GR-1089, 1.5kV (10/160µs) meets FCC Part 68



Typical applications

Communications equipment linecard application (ringing and test access), PABX, voice over IP, office equipment, measurement and control equipment, automotive equipment as CAN bus, keyless entry, speaker switch, medical equipment, consumer electronics, set top boxes, HiFi



Approvals

UL 508 File No. E 111441, UL 60950, IEC/EN60950 IEC Ref. Cert. No. 327

Technical data of approved types on request

Contact Data

Contact arrangement	2 form C (CO)
Max. switching voltage	220VDC, 250VAC
Rated current	2A
Limiting continuous current, 85°C	2A
Switching Power	60W, 62.5VA
Contact material	AgNi, gold-covered
Contact style	bifurcated contact
Minimum switching voltage	100µV
Thermo-electrical potential	<10µV
Initial contact resistance	<50mΩ at 10mA, 20mV
Frequency of operation, without load	50 operations/s
Operate time	typ. 2ms, max. 4ms
Set/reset time	typ. 2ms, max. 4ms
Release time	
without diode in parallel	typ. 2ms, max. 4ms
with diode in parallel	typ. 4ms, max. 6ms
Bounce time	typ. 1ms, max. 3ms
Electrical endurance	
at 12V / 10mA	typ. 5x10 ⁷ operations
at 6V / 100mA	typ. 1x10 ⁷ operations
at 60V / 500mA	typ. 5x10 ⁵ operations
at 30V / 1000mA	typ. 1x10 ⁶ operations
at 30V / 2000mA	typ. 2x10 ⁵ operations
Contact ratings, UL	110VDC / 0.3A - 33W 30VDC / 2.0A - 60W 120VAC / 0.5A - 60VA 240VAC / 0.25A - 60VA
Mechanical endurance	typ. 100x10 ⁶ operations


Coil Data

Magnetic system	polarized
Coil voltage range	2 to 24VDC
Max. coil temperature	125°C
Thermal resistance	< 125K/W


Coil versions, monostable

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
008	3.00	2.25	6.50	0.30	64	140
016	4.00	3.00	8.70	0.40	114	140
011	4.50	3.38	9.80	0.45	145	140
001	5.00	3.75	10.90	0.50	178	140
002	6.00	4.50	13.00	0.60	257	140
006	9.00	6.75	19.60	0.90	578	140
003	12.00	9.00	26.15	1.20	1029	140
005	24.00	18.00	52.30	2.40	4114	140

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coil voltages on request.

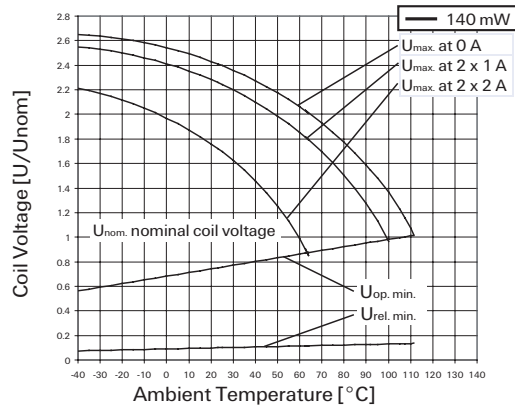

Max. DC load breaking capacity

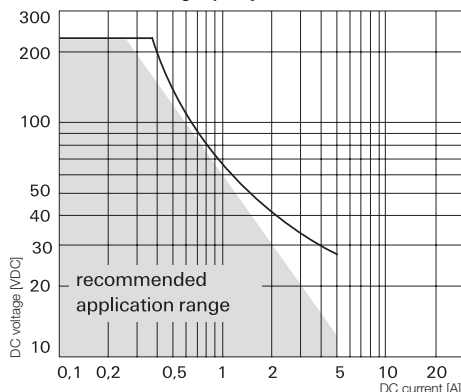

P2 Relay V23079 (Continued)

Coil Data (continued)

Coil versions, bistable


Coil code	Rated voltage VDC	Set voltage VDC	Limiting Voltage VDC	Reset voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
Bistable, 1 coil						
108	3.00	2.25	9.2	-2.25	128	70
111	4.50	3.38	13.85	-3.38	289	70
101	5.00	3.75	15.33	-3.75	357	70
102	6.00	4.50	18.5	-4.50	514	70
106	9.00	6.75	27.75	-6.75	1157	70
103	12.00	9.00	37	-9.00	2057	70
105	24.00	18.00	74	-18.00	8228	70

Bistable, 2 coil

219	2.00	1.50	4.33	1.50	28	140
218	2.40	1.80	5.2	1.80	41	140
208	3.00	2.25	6.5	2.25	64	140
211	4.50	3.38	9.8	3.38	145	140
201	5.00	3.75	10.9	3.75	178	140
202	6.00	4.50	13	4.50	257	140
206	9.00	6.75	19.6	6.75	578	140
203	12.00	9.00	26.15	9.00	1029	140
205	24.00	18.00	52.3	18.00	4114	140

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

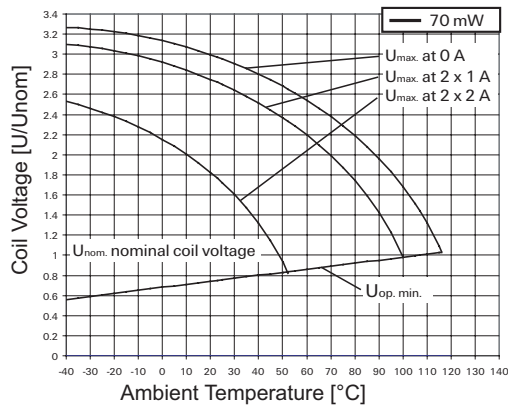


Coil versions, high dielectric version, monostable, overmolded

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release Voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
008	3.00	2.25	12.00	0.30	45	200
001	5.00	3.75	12.00	0.50	125	200
002	6.00	4.50	12.00	0.60	180	200
006	9.00	6.75	12.00	0.90	405	200
003	12.00	9.00	12.00	1.20	720	200

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

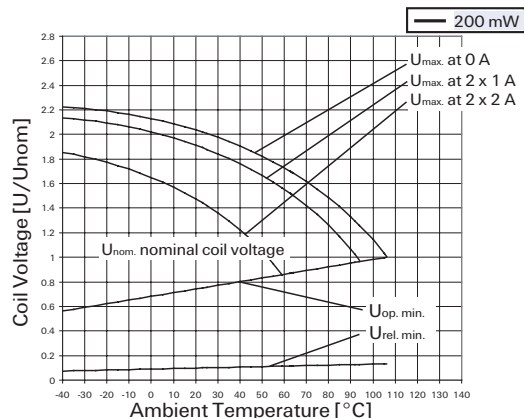

Insulation Data

	Standard	HDV
Initial dielectric strength		
between open contacts	1000V _{rms}	1500V _{rms}
between contact and coil	1500V _{rms}	1500V _{rms}
between adjacent contacts	1000 V _{rms}	1500V _{rms}
Initial surge withstand voltage		
according to Telcordia TR-NWT-001089 (2/10µs)		
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
according to (10/700 µs IEC 60950)		
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
Initial insulation resistance at 500 Vdc		
	> 10 ⁹ Ω	
Capacitance		
between open contacts	max. 1pF	
between contact and coil	max. 2pF	
between adjacent contacts	max. 1.5pF	
Clearance /creepage		
according to IEC / EN 60950	1.3/2.5mm	

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter


Ambient temperature	-40 to +85°C
Category of environmental protection	IEC 61810
Degree of protection, IEC 60529	RT III - wash tight IP 67
Vibration resistance (functional)	35g, 10 to 1000Hz
Shock resistance (functional)	IEC 60068-2-27 (half sine)
Terminal type	50g PCB-THT, SMT long and short terminals
Weight	max. 2.8 g
Resistance to soldering heat THT	IEC 60068-2-20
Resistance to soldering heat SMT	IEC 60068-2-58
Moisture sensitive level, JEDEC J-Std-020D	see Resistance to soldering heat MSL3
Ultrasonic cleaning	not recommended
Packaging/unit	
THT	box/2000 pcs.
SMT	reel/2000 pcs. or 2500 pcs.

P2 Relay V23079 (Continued)

Terminal assignment


TOP view on component side of PCB

Monostable version




ECR0912-C

Bistable version, 1-coil



ECR0912-C

Bistable version, 2-coils

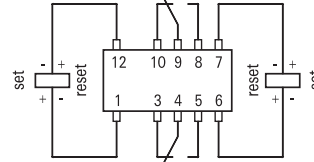


ECR0913-K

Contacts are shown in reset condition.
Both coils can be used as either set or reset coils.
Contact position might change during transportation and must be reset before use.

PCB layout


TOP view on component side of PCB

THT version

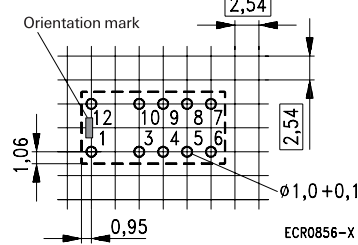


ECR0856-X

SMT, long terminals



P2 SMT L Layout


SMT, short terminals




Dimensions

Standard coil


THT version

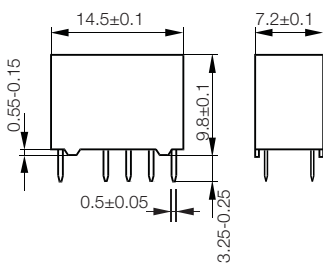

SMT, long terminals

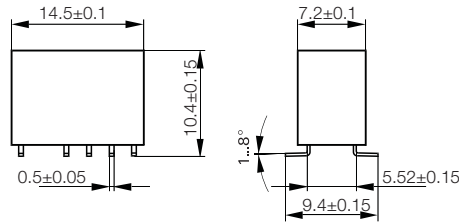


SMT, short terminals

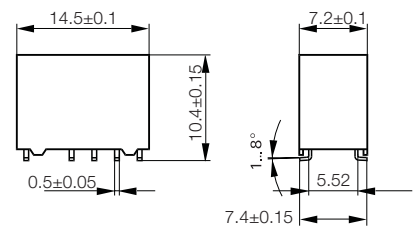


Overmolded coil, high dielectric version


THT version

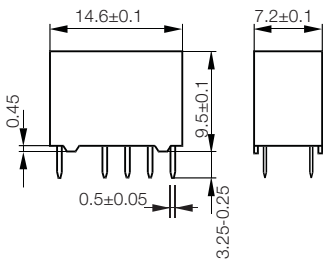

SMT, long terminals

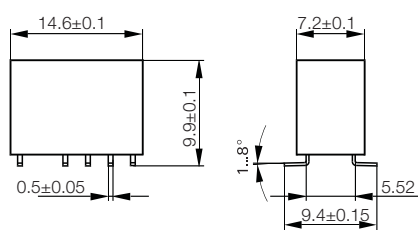








SMT, short terminals

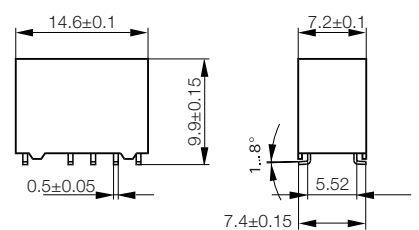

P2 Relay V23079 (Continued)

Processing

Packing

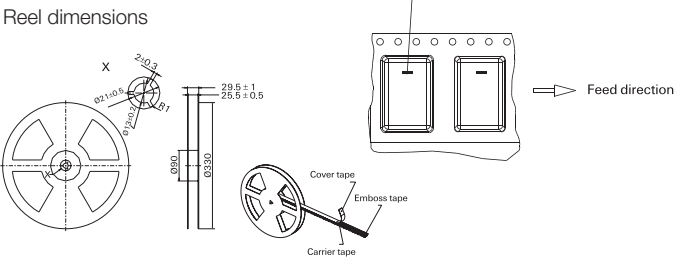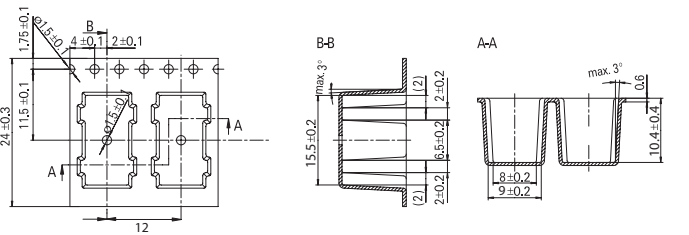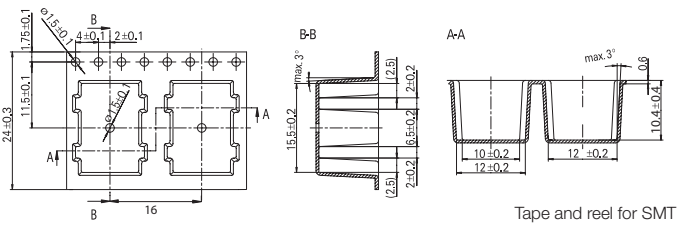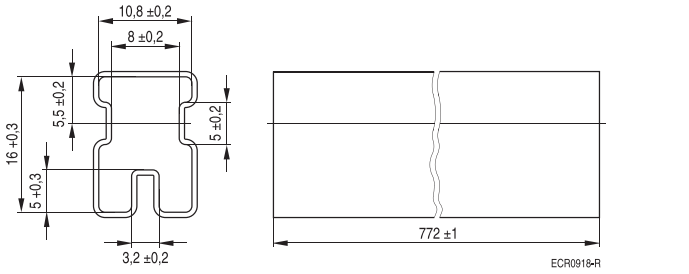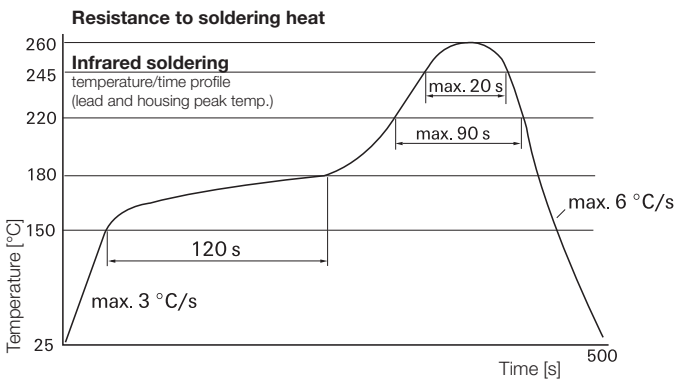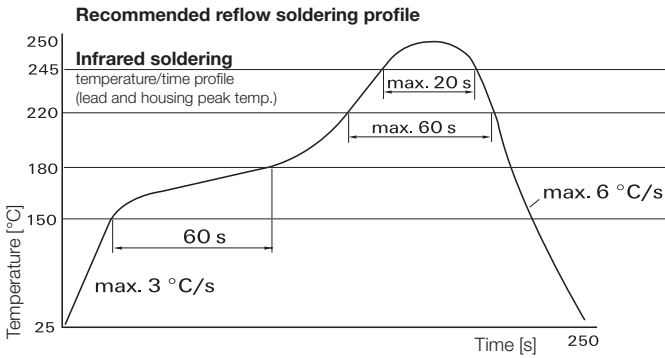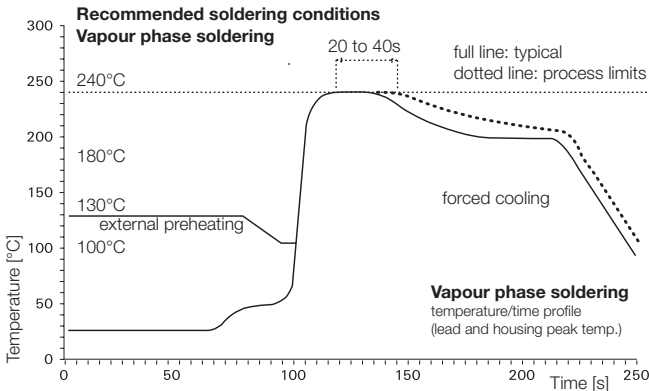

P2 Relay V23079 (Continued)

Product code structure

Typical product code **V23079 A 1 001 B 301**

Type V23079 Signal Relay P2 Series		
Version		
A THT, monostable	D SMT, monostable, long term.	G SMT, monostable, short term.
B THT, latching, 2 coils	E SMT, latching, 2 coils long term.	H SMT, latching, 2 coils short term.
C THT, latching, 1 coil	F SMT, latching, 1 coil long term.	J SMT, latching, 1 coil short term.
Coil design		
1 Standard coil (not for high dielectric version)		
2 Overmolded coil		
Coil Coil code: please refer to coil versions table		
Version		
B Standard version		
X High dielectric version		
Contacts for standard versions		
301 2 form C contacts (2 CO), AgNi +Au		
201 2 form C contacts (2 CO), AgPd +Au; on request only		

Product code	Coil design	Version	Coil type	Coil voltage	Part number			
V23079-A1008-B301	THT	Standard	Monostable	3VDC	2-1393788-2			
V23079-A1016-B301				4VDC	2-1393788-9			
V23079-A1011-B301				4.5VDC	2-1393788-4			
V23079-A1001-B301				5VDC	1393788-3			
V23079-A1002-B301				6VDC	1393788-8			
V23079-A1006-B301				9VDC	2-1393788-0			
V23079-A1003-B301				12VDC	1-1393788-1			
V23079-A1005-B301				24VDC	1-1393788-6			
V23079-A2008-B301				Overmolded			3VDC	6-1419120-6
V23079-A2011-B301							4.5VDC	3-1393789-9
V23079-A2001-B301	5VDC	3-1393789-5						
V23079-A2002-B301	6VDC	3-1393789-6						
V23079-A2006-B301	9VDC	3-1393789-8						
V23079-A2003-B301	12VDC	3-1393789-7						
V23079-B1218-B301	Standard		Bistable, 2 coils				2.4VDC	1422002-8
V23079-B1208-B301							3VDC	4-1393788-1
V23079-B1211-B301							4.5VDC	4-1393788-2
V23079-B1201-B301							5VDC	3-1393788-3
V23079-B1202-B301				6VDC	3-1393788-5			
V23079-B1206-B301				9VDC	3-1393788-9			
V23079-B1203-B301				12VDC	3-1393788-6			
V23079-B1205-B301				24VDC	3-1393788-7			
V23079-B2219-B301				Overmolded			2VDC	1-1422002-2
V23079-B2218-B301							2.4VDC	1-1422002-1
V23079-B2208-B301	3VDC	1-1422002-0						
V23079-B2201-B301	5VDC	1422002-9						
V23079-C1108-B301	Standard		Bistable, 1 coil				3VDC	5-1393788-3
V23079-C1111-B301							4.5VDC	5-1393788-4
V23079-C1101-B301							5VDC	4-1393788-5
V23079-C1102-B301							6VDC	4-1393788-7
V23079-C1106-B301							9VDC	5-1393788-1
V23079-C1103-B301							12VDC	4-1393788-8
V23079-C1105-B301				24VDC	5-1393788-0			

P2 Relay V23079 (Continued)

Product code	Version	Coil design	Coil type	Coil voltage	Part number		
V23079-D1008-B301	SMT, long pins		Monostable	3VDC	6-1393788-1		
V23079-D1011-B301				4.5VDC	6-1393788-2		
V23079-D1001-B301				5VDC	5-1393788-5		
V23079-D1002-B301				6VDC	5-1393788-6		
V23079-D1006-B301				9VDC	5-1393788-9		
V23079-D1003-B301				12VDC	5-1393788-7		
V23079-D1005-B301				24VDC	5-1393788-8		
V23079-D2008-B301				Overmolded		3VDC	4-1393789-7
V23079-D2011-B301						4.5VDC	4-1393789-8
V23079-D2001-B301						5VDC	4-1393789-3
V23079-D2002-B301		6VDC	4-1393789-4				
V23079-D2006-B301		Standard		9VDC	4-1393789-6		
V23079-D2003-B301				12VDC	4-1393789-5		
V23079-E1219-B301				Bistable, 2 coils	2VDC	1-1422007-0	
V23079-E1218-B301					2.4VDC	1422007-5	
V23079-E1208-B301						3VDC	7-1393788-1
V23079-E1211-B301						4.5VDC	7-1393788-2
V23079-E1201-B301						5VDC	6-1393788-8
V23079-E1202-B301						6VDC	1393789-5
V23079-E1206-B301						9VDC	1393789-9
V23079-E1203-B301	12VDC					6-1393788-9	
V23079-E1205-B301	24VDC	7-1393788-0					
V23079-E2219-B301	2VDC	1422007-6					
V23079-F1108-B301			Bistable, 1 coil			3VDC	7-1393788-5
V23079-F1111-B301						4.5VDC	1-1393789-4
V23079-F1101-B301			5VDC	7-1393788-3			
V23079-F1102-B301			6VDC	1-1393789-0			
V23079-F1106-B301			9VDC	1-1393789-2			
V23079-F1103-B301			12VDC	7-1393788-4			
V23079-F1105-B301			24VDC	1-1393789-1			
V23079-G1008-B301			SMT, short pins		Monostable	3VDC	8-1393788-0
V23079-G1001-B301						5VDC	7-1393788-6
V23079-G1002-B301						6VDC	1-1393789-5
V23079-G1006-B301	9VDC	1-1393789-6					
V23079-G1003-B301	12VDC	7-1393788-7					
V23079-G1005-B301	24VDC	7-1393788-8					
V23079-G2008-B301	Overmolded					3VDC	5-1393789-4
V23079-G2016-B301						4VDC	1393790-5
V23079-G2011-B301						4.5VDC	5-1393789-5
V23079-G2001-B301						5VDC	4-1393789-9
V23079-G2002-B301	Standard			6VDC	5-1393789-0		
V23079-G2006-B301				9VDC	5-1393789-3		
V23079-G2003-B301				12VDC	5-1393789-1		
V23079-H1208-B301				Bistable, 2 coils	3VDC	2-1393789-4	
V23079-H1211-B301					4.5VDC	8-1393788-4	
V23079-H1201-B301						5VDC	2-1393789-0
V23079-H1202-B301						6VDC	2-1393789-1
V23079-H1206-B301						9VDC	2-1393789-3
V23079-H1203-B301						12VDC	8-1393788-3
V23079-H1205-B301						24VDC	2-1393789-2
V23079-J1108-B301	Bistable, 1 coil		3VDC			2-1393789-9	
V23079-J1111-B301			4.5VDC			3-1393789-0	
V23079-J1101-B301			5VDC			2-1393789-5	
V23079-J1102-B301			6VDC			2-1393789-6	
V23079-J1103-B301			12VDC			2-1393789-7	
V23079-J1105-B301			24VDC	2-1393789-8			
V23079-G2008-X079			High dielectric		Monostable	3VDC	1422006-5
V23079-G2001-X071						5VDC	1422006-1
V23079-G2002-X072	6VDC	1422006-2					
V23079-G2006-X073	9VDC	1422006-3					
V23079-G2003-X074	12VDC	1422006-4					
V23079-A2003-X074	12VDC	1422025-7					
V23079-A2008-X079	3VDC	1-1422025-1					